

SPECIFICATION OF FBCA SERIES


FEATURES

1. High impedance for common mode noise and low impedance for differential mode signal.
2. Large rated current available.
3. Wide band or sharp type impedance cure available.
4. SMD or DIP available.



APPLICATIONS

Prevention of common mode noise on signal Lines and power lines for computer related or electronic products.

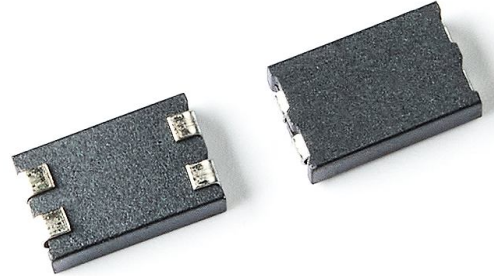


ORDERING CODE

FBCA - A - 562585 - T

(1) (2) (3) (4)



- (1) PRODUCT CODE
- (2) MATERIAL CODE
- (3) SIZE CODE
- (4) TAPING

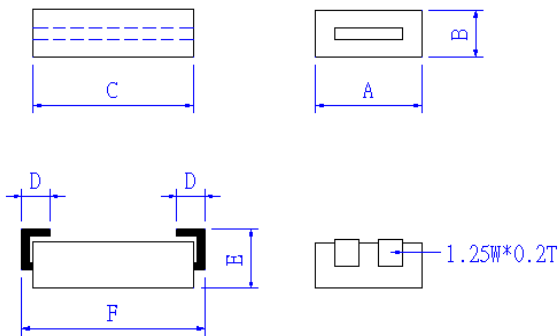

DIMENSIONS & CHARACTERISTICS

UNIT:mm

ORDERING CODE	A	B	C	D	E	F	BASE	WINDING	WIRING	Z+/-25% (Average) at 100MHz(Ω)	RATED CURRENT (mA)	RDC (Ω)max
FBCA-A-562585	5.6 ±0.4	2.5 ±0.3	8.5 ±0.4	1.5 ±0.5	3.2 max	8.9 ±0.4	SMD-4P(5.6*8.5mm)	φ1.25*1TS*2	1-4,2-3	62	6000	0.01

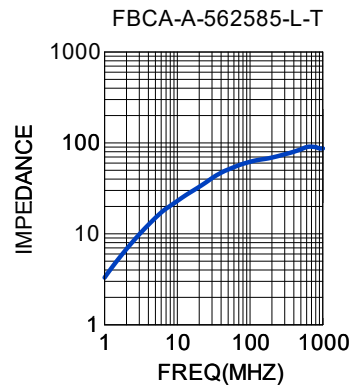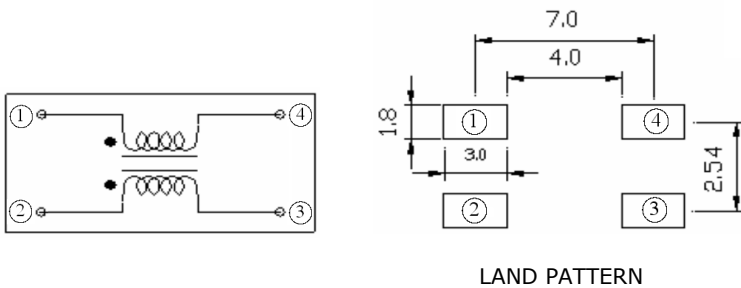

※IDC:Based on Temperature increase 40°C

※Operating temperature range : -55 to +125°C (including self-heating)

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.