

SPECIFICATION OF WCM-□□□□SRFAUTO SERIES

AEC-Q200



FEATURES

1. Low DCR, high rated current and excellent impedance characteristics.
2. Magnetically shielded.
3. Excellent common mode EMI noise suppression.
4. Virtually no distortion of signals.
5. Excellent thermal characteristics over temperature, compatible with Automotive operating temperature required.




APPLICATIONS

1. EMI suppression for power line , AC/DC adaptor, larger electronic equipment, perAUTOnal computers, peripherals, IoT etc.
2. Automotive entertainment equipment and control system.


ORDERING CODE

WCM - 5040 SRFAUTO - 501 I
 (1) (2) (3) (4) (5)


- (1) PRODUCT TYPE CODE
- (2) PRODUCT SIZE CODE
- (3) DESIGN CODE
- (4) IMPEDANCE
- (5) REEL TAPING

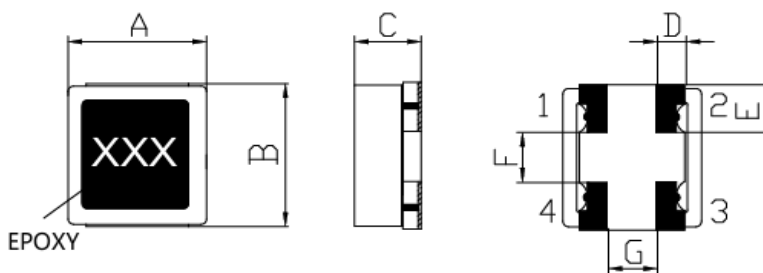

ELECTRICAL SCHEMATIC



PAD LAYOUT



SHAPE & DIMENSIONS

UNIT:mm





SIZE CODE	A ±0.30	B ±0.30	C max.	D Ref.	E Ref.	F Ref.	G Ref.	a	b	c	d
WCM-5025SRFAUTO	4.80	5.00	2.50	1.25	1.70	1.60	1.00	1.80	2.40	1.20	0.80
WCM-5040SRFAUTO	4.80	5.00	4.50	1.15	1.50	2.00	1.00	1.60	2.30	1.00	0.80

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

COMMON MODE CHOKE → WCM-5040SRFAUTO SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Impedance	DC Resistance	IDC	Rated Voltage	Insulation Resistance	
	(Ω)Typ	(Ω)	(A)	(V)	(M Ω)	
	100MHz	max.	Typ.	max.	min.	
WCM-5040SRFAUTO-191T	190	0.02	5.0	250	10	
WCM-5040SRFAUTO-351T	350	0.04	2.0	250	10	
WCM-5040SRFAUTO-102T	1000	0.06	1.5	250	10	
WCM-5040SRFAUTO-152T	1500	0.10	1.0	250	10	

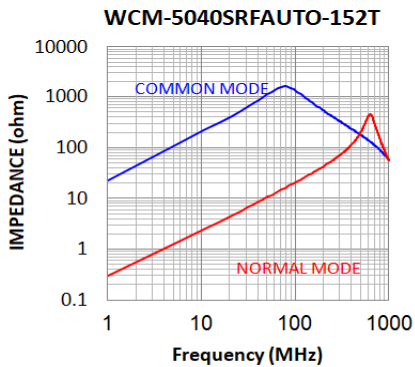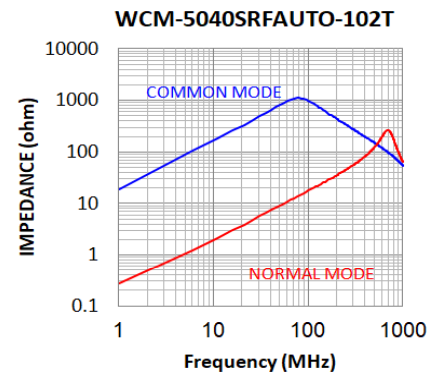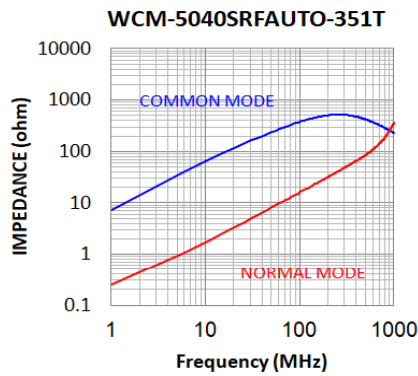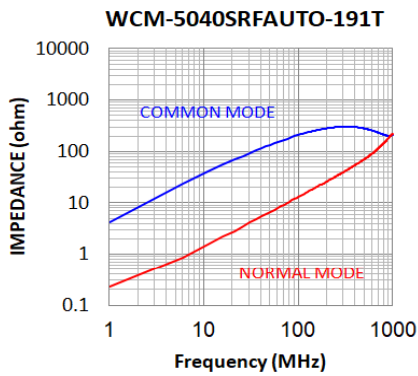

※IDC: Based on Temperature increase 40°C Typ.

※Operating temperature range : -40 to +125°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.