

SPECIFICATION OF BSF□□□□CDKC ,CRKC SERIES

FEATURES

1. High saturation current inductor with ferrite core and magnetic shielding design.
2. Low profile : Surface mounting(SMT) type and thickness with 2.0 to 5.0 mm for different size.
3. Low loss realized with low DCR.
4. Halogen free, lead free, RoHS compliant



APPLICATIONS

1. D/D converter unit design for 3C products, VRM for server.
2. DVD, HDD, STB, LCD display, IP CAM, GPS, USB connector, Smart phones, Face Recognition System, IoT application...etc

ORDERING CODE



BSF0302CRKC 122 M T
 (1) (2) (3) (4)

(1) PRODUCT TYPE CODE AND SIZE CODE(CRKC with lower resistance and CDKC with high saturation current design)

(2) INDUCTANCE

(3) INDUCTANCE TOLERANCE (K : ±10%, M : ±20%)

(4) REEL TAPING

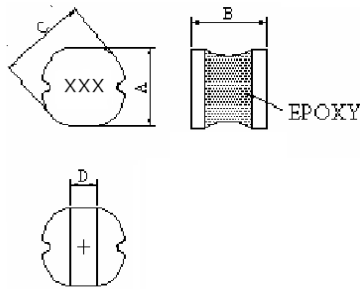

SHAPE & DIMENSIONS

UNIT:mm

SIZE CODE	A	B	C	D Typ.	E	F	G		
BSF0318CDKC	3.0±0.3	1.9(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0302CDKC	3.0±0.3	2.3(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0302CRKC	3.0±0.3	2.3(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0402CDKC	4.0±0.3	2.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0402CRKC	4.0±0.3	2.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0403CDKC	4.0±0.3	3.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0403CRKC	4.0±0.3	3.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0502CDKC	5.2±0.3	2.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0503CDKC	5.2±0.3	3.0±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0504CDKC	5.2±0.3	4.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0504CRKC	5.2±0.3	4.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0703CDKC	7.0±0.3	3.5±0.3	7.8±0.3	2.5	7.5	3.05	1.9		
BSF0705CDKC	7.0±0.3	5.0±0.3	7.8±0.3	2.5	7.5	3.05	1.9		
BSF0705CRKC	7.0±0.3	5.0±0.3	7.8±0.3	2.5	7.5	3.05	1.9		

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SPECIFICATION OF BSF□□□□CDKC ,CRKC SERIES

FEATURES

1. High saturation current inductor with ferrite core and magnetic shielding design.
2. Low profile : Surface mounting(SMT) type and thickness with 2.0 to 5.0 mm for different size.
3. Low loss realized with low DCR.
4. Halogen free, lead free, RoHS compliant





APPLICATIONS

1. D/D converter unit design for 3C products, VRM for server.
2. DVD, HDD, STB, LCD display, IP CAM, GPS, USB connector, Smart phones, Face Recognition System, IoT application...etc

ORDERING CODE

BSF0302CRKC 122 M T
 (1) (2) (3) (4)

- (1) PRODUCT TYPE CODE AND SIZE CODE(CRKC with lower resistance and CDKC with high saturation current design)
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (K : ±10%, M : ±20%)
- (4) REEL TAPING

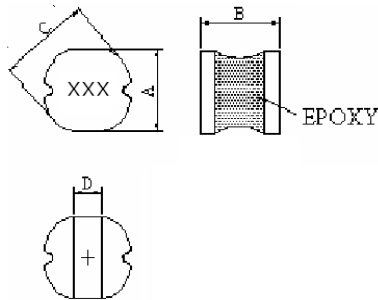

SHAPE & DIMENSIONS

UNIT:mm


SIZE CODE	A	B	C	D Typ.	E	F	G		
BSF1004CDKC	9.0±0.3	4.0±0.3	10.0±0.3	2.9	9.5	3.65	2.5		
BSF1005CDKC	9.0±0.3	5.4±0.3	10.0±0.3	2.9	9.5	3.65	2.5		
BSF1006CDKC	9.0±0.3	6.8±0.3	10.0±0.3	2.9	9.5	3.65	2.5		

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF0302CRKC SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μ H)	DC Resistance (m Ω)max	SRF (MHz)min	Isat (A)max	IDC (A)max
BSF0302CRKC122MT	1200	22000	0.8	0.06	0.16

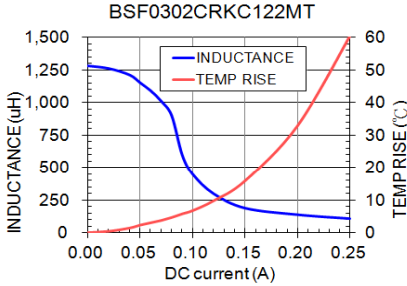

Test Freq.: 100KHz/0.1V
 Tolerance: K \pm 10%, M \pm 20%
 ※Isat: Based on Inductance decrease 30%
 ※IDC: Based on Temperature increase 40 $^{\circ}$ C
 ※Operating temperature range : -40 to +125 $^{\circ}$ C (including self-generated heat)

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.