

SPECIFICATION OF BSF□□□□CDKC ,CRKC SERIES

FEATURES

1. High saturation current inductor with ferrite core and magnetic shielding design.
2. Low profile : Surface mounting(SMT) type and thickness with 2.0 to 5.0 mm for different size.
3. Low loss realized with low DCR.
4. Halogen free, lead free, RoHS compliant



APPLICATIONS

1. D/D converter unit design for 3C products, VRM for server.
2. DVD, HDD, STB, LCD display, IP CAM, GPS, USB connector, Smart phones, Face Recognition System, IoT application...etc

ORDERING CODE



BSF0402CRKC 6R8 M T
 (1) (2) (3) (4)

(1) PRODUCT TYPE CODE AND SIZE CODE(CRKC with lower resistance and CDKC with high saturation current design)

(2) INDUCTANCE

(3) INDUCTANCE TOLERANCE (K : ±10%, M : ±20%)

(4) REEL TAPING

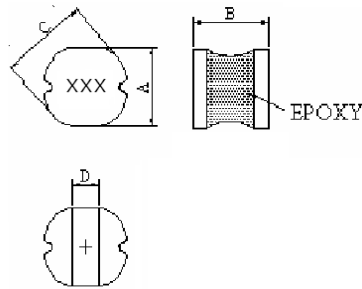

SHAPE & DIMENSIONS

UNIT:mm

SIZE CODE	A	B	C	D Typ.	E	F	G		
BSF0318CDKC	3.0±0.3	1.9(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0302CDKC	3.0±0.3	2.3(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0302CRKC	3.0±0.3	2.3(max)	3.5±0.3	1.2	3.5	1.60	0.8		
BSF0402CDKC	4.0±0.3	2.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0402CRKC	4.0±0.3	2.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0403CDKC	4.0±0.3	3.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0403CRKC	4.0±0.3	3.2±0.3	4.5±0.3	1.5	4.5	2.10	0.8		
BSF0502CDKC	5.2±0.3	2.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0503CDKC	5.2±0.3	3.0±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0504CDKC	5.2±0.3	4.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0504CRKC	5.2±0.3	4.5±0.3	5.8±0.3	2.0	5.5	2.25	1.5		
BSF0703CDKC	7.0±0.3	3.5±0.3	7.8±0.3	2.5	7.5	3.05	1.9		
BSF0705CDKC	7.0±0.3	5.0±0.3	7.8±0.3	2.5	7.5	3.05	1.9		
BSF0705CRKC	7.0±0.3	5.0±0.3	7.8±0.3	2.5	7.5	3.05	1.9		

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

