

SPECIFICATION OF BSF□D□□RHSU SERIES

FEATURES

Compact and thin Large permissible DC current and low DC resistance.



APPLICATIONS

1. DC to DC converter of portable equipment.
2. Camcorder , LCD television set , Digital still camera , P.D.A. , Notebook.
3. Small size communication equipment.




ORDERING CODE


BSF2D11RHSU **100** **N** **T**
 (1) (2) (3) (4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

2D 3D

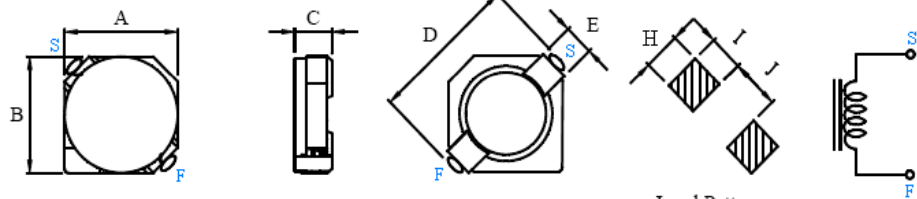

4D 5D 6D

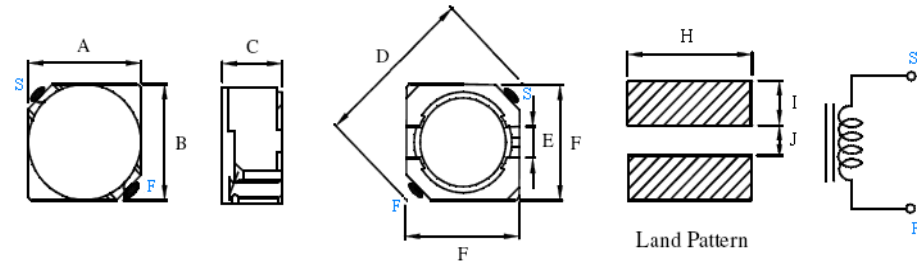


SHAPE & DIMENSIONS

SIZE CODE	A (max)	B (max)	C (max)	D (max)	E (Ref.)	F	H	I	J
BSF2D09RHSU	3.2	3.2	1.00	4.3	1.0	-	1.3	1.3	1.7
BSF2D11RHSU	3.2	3.2	1.20	4.3	1.0	-	1.3	1.3	1.7
BSF2D14RHSU	3.2	3.2	1.55	4.3	1.0	-	1.3	1.3	1.7
BSF2D18RHSU	3.2	3.2	2.00	4.3	1.0	-	1.3	1.3	1.7
BSF3D11RHSU	4.0	4.0	1.20	5.2	1.0	-	1.3	1.4	2.4
BSF3D16RHSU	4.0	4.0	1.80	5.2	1.0	-	1.3	1.4	2.4
BSF3D28RHSU	4.0	4.0	3.00	5.2	1.0	-	1.3	1.4	2.4
SIZE CODE	A ±0.3	B ±0.3	C (max)	D (max)	E (Ref.)	F (Ref.)	H	I	J
BSF4D18RHSU	4.7	4.7	2.0	6.9	1.5	4.5	5.3	1.90	1.5
BSF4D28RHSU	4.7	4.7	3.0	6.9	1.5	4.5	5.3	1.90	1.5
BSF5D18RHSU	5.7	5.7	2.0	8.2	2.0	5.5	6.3	2.15	2.0
BSF5D28RHSU	5.7	5.7	3.0	8.2	2.0	5.5	6.3	2.15	2.0
BSF6D28RHSU	6.7	6.7	3.0	9.5	2.0	6.5	7.3	2.65	2.0
BSF6D38RHSU	6.7	6.7	4.0	9.5	2.0	6.5	7.3	2.65	2.0

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF□D□□RHSU SERIES

8D Series

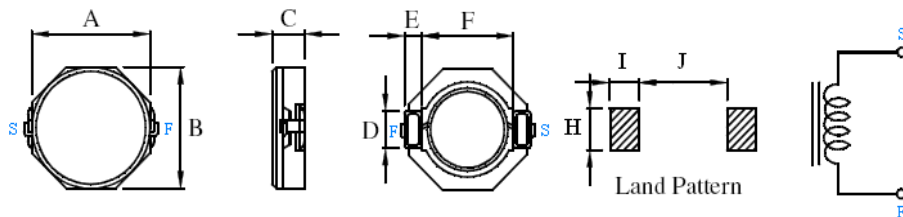

UNIT:mm

SIZE CODE	A (max)	B (max)	C (max)	D (max)	E (Ref.)	F	H	I	J
BSF8D28RHSU	8.3	8.3	3.0	2.5	1.2	6.3	2.8	2.0	6.1
BSF8D43RHSU	8.3	8.3	4.5	2.5	1.2	6.3	2.8	2.0	6.1

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF2D11RHSU SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μ H)	Test Frequency (KHz)	DC Resistance (Ω)max	Isat (A)max
BSF2D11RHSU1R5NT	1.5	100	0.0680	0.90
BSF2D11RHSU2R2NT	2.2	100	0.0980	0.78
BSF2D11RHSU3R3NT	3.3	100	0.1230	0.60
BSF2D11RHSU4R7NT	4.7	100	0.1700	0.50
BSF2D11RHSU5R6NT	5.6	100	0.2300	0.48
BSF2D11RHSU6R8NT	6.8	100	0.2600	0.44
BSF2D11RHSU8R2NT	8.2	100	0.3500	0.38
BSF2D11RHSU100NT	10.0	100	0.4000	0.35
BSF2D11RHSU150NT	15.0	100	0.6200	0.28
BSF2D11RHSU220NT	22.0	100	1.5000	0.20
BSF2D11RHSU330NT	33.0	100	1.8000	0.15

Test Freq.:100KHz/0.1V

Tolerance : N± 30%

※Isat:Based on Inductance decrease 35%

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.



KING CORE ELECTRONICS INC.
Tel:886-3-4698855 Fax:886-3-4691395

No.269,Nanfong Rd.,Pingjhen City,Taoyuan County, Taiwan
E-mail:kc@mail.kingcore.com.tw Web Site:http://www.kingcore.com.tw