

SPECIFICATION OF BSFxxxxSMSE SERIES

FEATURES

1. High performance (Isat) realized by metal dust core.
2. Low profile : Thickness with 2.0 to 7.0 mm for different size.
3. Low loss realized with low DCR.
4. Capable of corresponding high frequency (1MHz).
5. Halogen free, lead free, RoHS compliant.



APPLICATIONS


DC/DC Converter for CPU in Notebook PC.
Thin type on-board power supply module for exchanger. VRM for server.
Graphic Card , DSC , Mobile Phone , LCD panel , LCD TV , HDD.

ORDERING CODE

BSF0402SMSE R22 M T
(1) (2) (3)(4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

Unit: mm

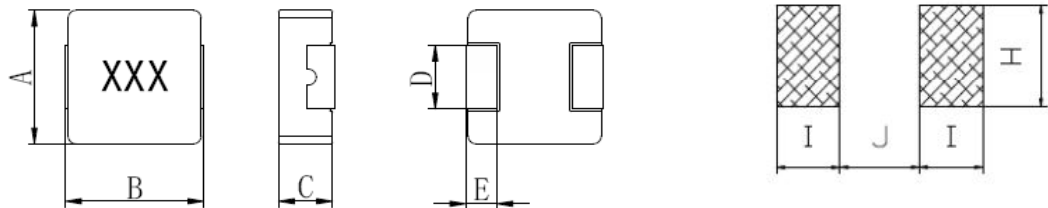

LAND PATTERN

SHAPE & DIMENSIONS

SIZE CODE	A mm	B mm	C max	D mm	E mm	H TYP	I TYP	J TYP		
BSF0402SMSE	4.20±0.25	4.40±0.35	1.8±0.2	2.0REF	0.8REF	2.5	1.5	2.2		
BSF0603SMSE	6.6±0.2	7.0±0.3	2.8±0.2	3.0REF	1.6REF	3.5	2.35	3.7		
BSF1004SMSE	10.0±0.3	11.5max	3.8±0.2	3.0REF	2.0REF	4.1	4.1	5.4		
BSF1265SMSE	12.6±0.3	13.45±0.35	6.5max	5.0REF	2.0REF	5.0	3.25	8.0		
BSF1770SMSE	17.15max	17.15±0.35	7.0max	12.0REF	2.5REF	12.19	3.17	11.68		

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF0402SMSE SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μH)	DC Resistance ($\text{m}\Omega$)max	Isat (A)TYP	IDC (A)TYP
BSF0402SMSE10MT	0.10	4.0	22.0	13.0
BSF0402SMSE22MT	0.22	6.6	12.5	9.5
BSF0402SMSE33MT	0.33	11.0	12.0	10.0
BSF0402SMSE47MT	0.47	14.0	9.5	7.5
BSF0402SMSE56MT	0.56	16.0	9.0	7.0
BSF0402SMSE68MT	0.68	18.0	8.0	7.0
BSF0402SMSE1R0MT	1.0	27.0	7.0	6.0
BSF0402SMSE1R2MT	1.2	27.0	6.5	6.0
BSF0402SMSE1R5MT	1.5	46.0	5.5	5.0
BSF0402SMSE2R2MT	2.2	58.0	5.0	4.5
BSF0402SMSE3R3MT	3.3	87.0	3.5	3.3
BSF0402SMSE4R7MT	4.7	105.0	3.0	2.8
BSF0402SMSE6R8MT	6.8	175.0	2.5	2.4
BSF0402SMSE100MT	10	282.0	2.0	1.6
BSF0402SMSE220MT	22	363.0	1.4	1.2

※Test Frequency : 100KHz/1V

※Isat: Based on Inductance decrease 30%

※IDC: Based on Temperature increase 40°C

※Operating temperature range : -40°C ~ +125°C (including self-heating)

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.



KING CORE ELECTRONICS INC.
Tel:886-3-4698855 Fax:886-3-4691395

No.269,Nanfong Rd.,Pingjhen City,Taoyuan County, Taiwan
E-mail:kc@mail.kingcore.com.tw Web Site:http://www.kingcore.com.tw